


Lifting Point RUD ABA

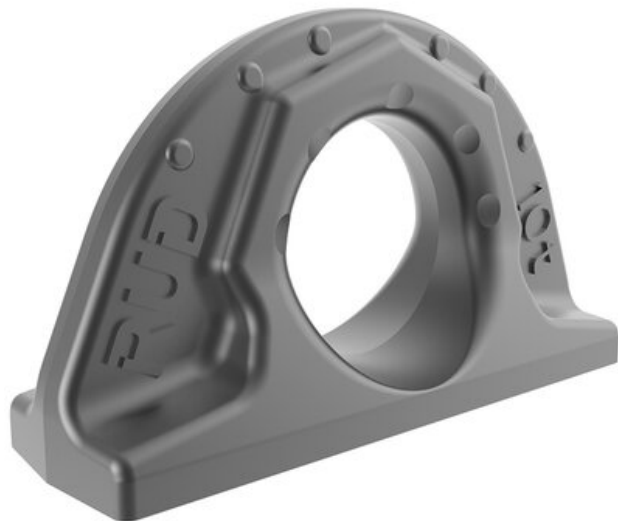

Product information

- 4:1 safety against breaking
- Patented markings for easy determination for withdraw of service
- Tempered base body, therefore wear-resistant
- 100% Electro-magnetic crack detection tested

Material: CrNiMo Steel

Marking: According to standard

Temperature range: -40°C up to 200°C

Standard: EN 1677-1

Safety factor: 4:1

| Part Code | WLL ton | A mm | B mm | C mm | D mm | E mm | F mm | T mm | Weight kg |
|--------------|---------|------|------|------|------|------|------|------|-----------|
| 421100080750 | 0.8 | 22 | 12 | 70 | 32 | 12 | 50 | 32 | 0.2 |
| 421100160750 | 1.6 | 30 | 16 | 100 | 35 | 16 | 57 | 42 | 0.45 |
| 421100320750 | 3.2 | 41 | 23 | 137 | 50 | 21 | 80 | 59 | 1.15 |
| 421100500750 | 5 | 51 | 27 | 172 | 60 | 28 | 99 | 72 | 2.26 |
| 421101000750 | 10 | 70 | 38 | 228 | 80 | 35 | 130 | 95 | 5.37 |
| 421102000750 | 20 | 90 | 52 | 272 | 115 | 40 | 175 | 135 | 10.72 |
| 421103150750 | 31.5 | 108 | 64 | 320 | 130 | 50 | 204 | 154 | 18.33 |

Blueprint

