


Wire Rope Dyform Plus

Product information

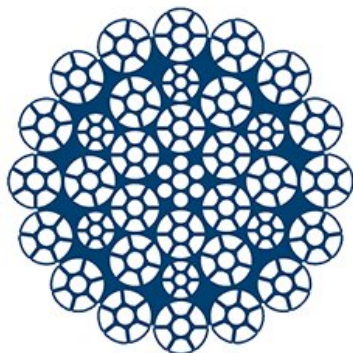

The Hydra is a range of high performance multi strand low rotational ropes for offshore oil and gas applications including offshore cranes, winches, and A&R lines.

- Engineered low rotational characteristics
- Dyform construction for crush & wear resistance
- Enhanced radial stiffness
- Recommended for multilayer spooling
- Low elongation

Rope construction: 35 x K19

Marking: According to standard

Standard: EN 12385-4

RCN: 300

Tolerance Ø: +2% to +4%

Part Code	Rope Diameter, mm	Tensile strength N/mm ²	Min. Breaking force, kN	Finish	Rope lay.
109807606270290	76	1,960	5,248	Galvanized	zZ
109810006270290	100	1,960	8,565	Galvanized	zZ