


## Wire Rope Dyform Plus

### Product information

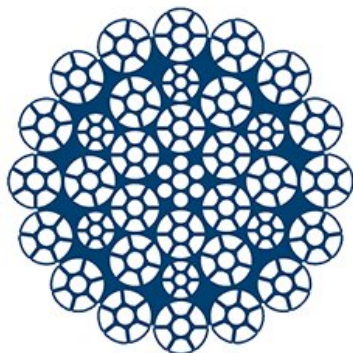

The Hydra is a range of high performance multi strand low rotational ropes for offshore oil and gas applications including offshore cranes, winches, and A&R lines.

- Engineered low rotational characteristics
- Dyform construction for crush & wear resistance
- Enhanced radial stiffness
- Recommended for multilayer spooling
- Low elongation

**Rope construction:** 35 x K19

**Marking:** According to standard

**Standard:** EN 12385-4

**RCN:** 300

**Tolerance Ø:** +2% to +4%

Part Code	Rope Diameter, mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay.	Min. Breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight
109807606270290	76	1,960	Galvanized	zZ	5,248	-	-	-
109810006270290	100	1,960	Galvanized	zZ	8,565	-	-	-