


Wire Rope Dyform Plus

Product information

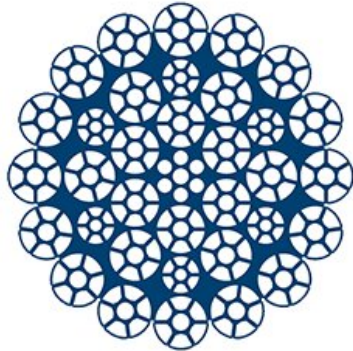

The Hydra is a range of high performance multi strand low rotational ropes for offshore oil and gas applications including offshore cranes, winches, and A&R lines.

- Engineered low rotational characteristics
- Dyform construction for crush & wear resistance
- Enhanced radial stiffness
- Recommended for multilayer spooling
- Low elongation

Rope construction: 35 x K19

Marking: According to standard

Standard: EN 12385-4

RCN: 300

Tolerance Ø: +2% to +4%

| Part Code | Rope Diameter, mm | Tensile strength N/mm ² | Finish | Rope lay. | Min. Breaking force kN | Steel area mm ² | Lubrication | Weight |
|-----------------|-------------------|------------------------------------|------------|-----------|------------------------|----------------------------|-------------|--------|
| 109807606270290 | 76 | 1,960 | Galvanized | zZ | 5,248 | - | - | - |
| 109810006270290 | 100 | 1,960 | Galvanized | zZ | 8,565 | - | - | - |