


## Wire Rope Dyform Bristar 6

### Product information

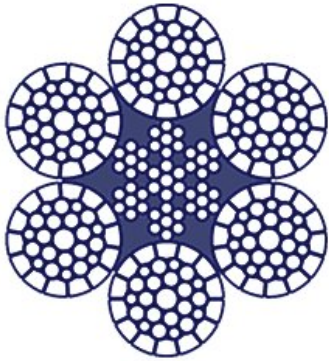

zZ G

Dyform Bristar 6 is a high performance compacted single layer constructed rope which incorporates an engineered extruded plastic profile between the 6 outer strands and the rope core for various cranes and industrial applications.

- Outstanding bending fatigue performance
- Improved support of outer strands in service

**Rope construction:** Dyform Bristar 6x47 IWRC

**Temperature range:** -20°C up to 65°C

Part Code	Rope Diameter,	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay.	Min. Breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103104456270719	44.5	1,960	Galvanized	zZ	1,713.81	-	SupplierStandard	841.7
103107006250719	70	1,770	Galvanized	zZ	3,530.39	-	SupplierStandard	2,165.5