


## Anchor Starcon Load Group 7,5 t

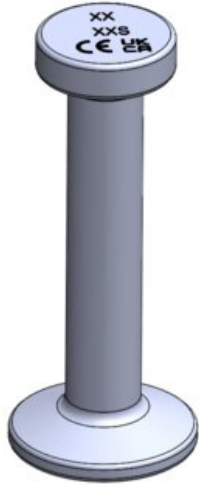

### Product information

The Starcon spherical head anchor load group 7,5 t is a steel component made for concrete casting. The foot of the anchor is constructed especially for strong concrete anchorage.

The cylindrical head of the spherical anchor is attached to a Starcon Lifting eye, standard coupling lifting eye for lifting.

The Starcon product is designed according to EN13155-2009 and follows the guidelines in VDI/BV-BS 6205 and DS/CEN/TR 15728.

**Marking:** CE-marked, UKCA-marked, Batch code, Load group+S (Starcon)

**Finish:** Untreated, hot dip galvanized or stainless

Part Code	Load grp.	Length mm	Finish	D mm	D1 mm	D2 mm	L mm	Weight kg
65011007501201	7.5t	120	Untreated	24	47	60	120	0.73
65011007501202	7.5t	120	HDG	24	47	60	120	0.73
65011007501401	7.5t	140	Untreated	24	47	60	140	0.81
65011007501402	7.5t	140	HDG	24	47	60	140	0.81
65011007501651	7.5t	165	Untreated	24	47	60	165	0.89
65011007501652	7.5t	165	HDG	24	47	60	165	0.89
65011007502001	7.5t	200	Untreated	24	47	60	200	1.01
65011007502002	7.5t	200	HDG	24	47	60	200	1.01
65011007503001	7.5t	300	Untreated	24	47	60	300	1.36
65011007503002	7.5t	300	HDG	24	47	60	300	1.36
65011007505401	7.5t	540	Untreated	24	47	60	540	2.24
65011007505402	7.5t	540	HDG	24	47	60	540	2.24

## Blueprint

